



STAINLESS  
STEEL  
PRODUCTS  
CATALOG



# Dear Sirs/Madams,

Our family-run company will make every effort to satisfy our customers.

We are doing our best to select a best product from our range to meet customers' needs and to make it as "long-life", for a specific application, as it is possible.

We use top quality electrical equipment.

We are looking forward to doing business with you.



## Table of contents

**03** Boiling pans

**06** Boiling pans with a mixer

**07** Carts

**08** Furniture

**09** Hygiene

**10** Accessories

**11** Electrical equipment



## DOUBLE-WALLED BOILING PAN - THERMOSTAT

90 l / 120 l / 150 l / 200 l

Temperature adjustment with a mechanical thermostat.



Capacity	Power supply	Power	External dimension	Internal dimension
90 l	400	7 kW	dia. 540 mm height 860 mm	dia. 470 mm height 530 mm
120 l	400	8 kW	dia. 600 mm height 860 mm	dia. 540 mm height 530 mm
150 l	400	9 kW	dia. 660 mm height 860 mm	dia. 600 mm height 530 mm
200 l	400	12 kW	dia. 760 mm height 860 mm	dia. 700 mm height 530 mm

Dimension tolerance: 5-10 mm

## DOUBLE-WALLED BOILING PAN - BACKER

90 l / 150 l / 200 l

Temperature adjustment with an electronic thermostat. More accurate temperature measurement.



Capacity	Power supply	Power	External dimension	Internal dimension
90 l	400	8 kW	dia. 540 mm height 860 mm	dia. 470 mm height 530 mm
150 l	400	9 kW	dia. 660 mm height 860 mm	dia. 600 mm height 530 mm
200 l	400	9 kW	dia. 760 mm height 860 mm	dia. 700 mm height 530 mm

Dimension tolerance: 5-10 mm

# THREE-WALLED BOLING PAN - SQUARE

with internal insulation

It is possible to use a temperature controller:

- mechanical thermostat
- Digital temperature controller



Capacity	Power supply	Power	External dimension	Internal dimension
150 l	400	9 kW	700 x 700 x 920 mm	dia. 600 mm height 530 mm
200 l	400	12 kW	850 x 900 x 920 mm	dia. 700 mm height 530 mm
300 l	400	24 kW	1115 x 1178 x 1020 mm	900 mm x 800 mm x 400 mm

Dimension tolerance: 5-10 mm



## DOUBLE-WALLED BOILING PAN - DIGITAL

90 l / 150 l / 200 l

Temperature adjustment with a digital thermostat. The boiling pan features more accurate temperature measurement.




Capacity	Power supply	Power	External dimension	Internal dimension
90 l	400	8 kW	dia. 540 mm height 1060 mm	dia. 470 mm height 530 mm
150 l	400	9/12 kW	dia. 600 mm height 1060 mm	dia. 600 mm height 530 mm
200 l	400	12/18 kW	dia. 760 mm height 1060 mm	dia. 695 mm height 530 mm

Dimension tolerance: 5-10 mm

## TRIPLE-WALLED ROUND BOILING PAN - INSULATED

90 l / 150 l / 200 l

Internally insulated boiling pan. It is possible to use: a heater with a mechanical thermostat or a heater with a digital thermostat.

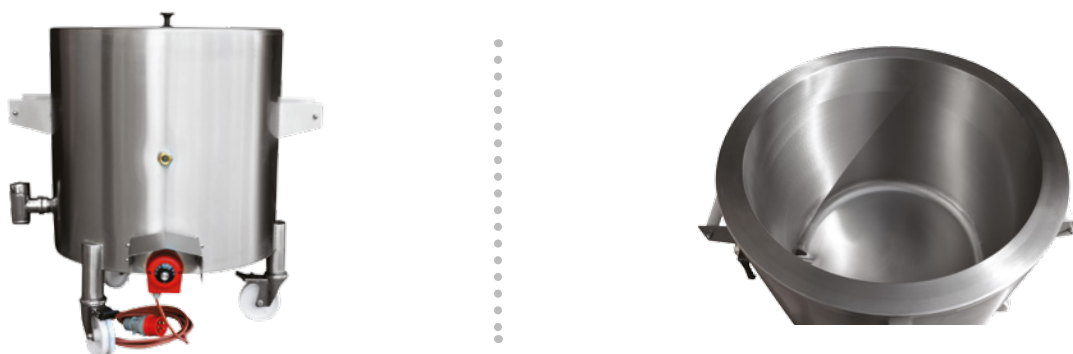

Capacity	Power supply	Power	External dimension	Internal dimension
90 l	400	8 kW	dia. 570 mm height 860 mm	dia. 470 mm height 530 mm
150 l	400	9 kW	dia. 690 mm height 860 mm	dia. 600 mm height 530 mm
200 l	400	9 kW	dia. 790 mm height 860 mm	dia. 700 mm height 530 mm

Dimension tolerance: 5-10 mm

## BOILING PAN WITH A MIXER

The product can be customized to meet customers' needs

Boiling pans with a mixer for use with liquid substances.



# CARTS

standard products

Customizable.



**FURNITURE**  
produkty standardowe


Customizable.







**HYGIENE**  
standard products

Customizable.

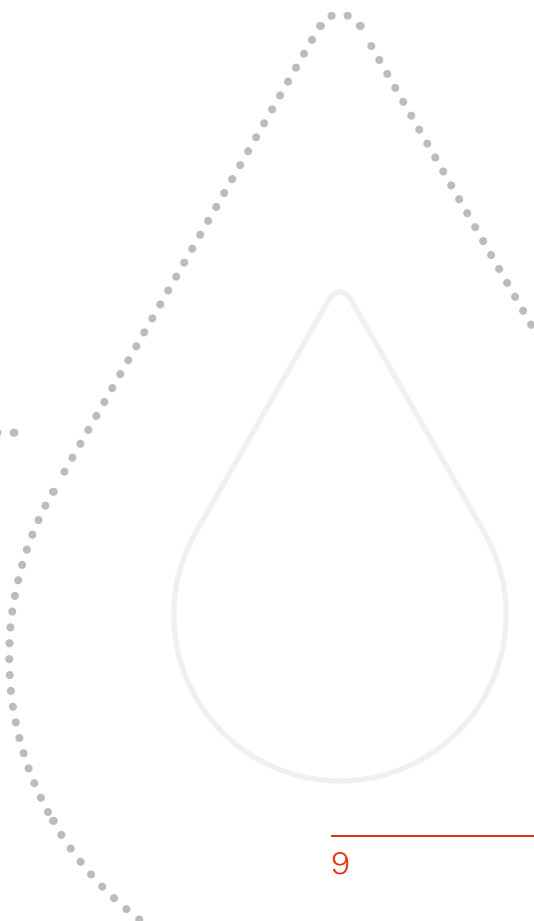

# ACCESSORIES

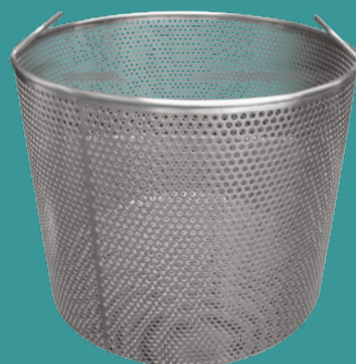
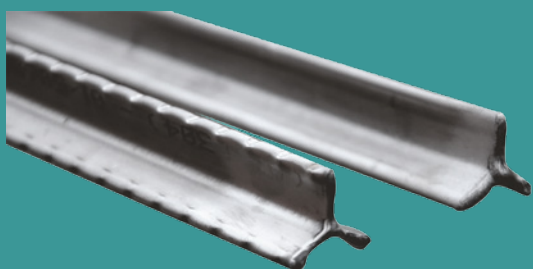


# ELECTRICAL EQUIPMENT

standard products

We use top quality electrical equipment provided by branded Polish and German suppliers.



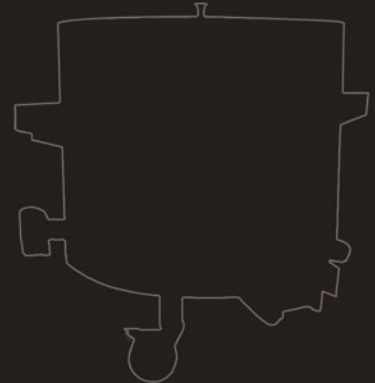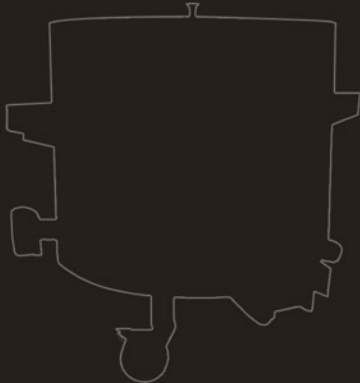

**M&M Wyroby ze stali nierdzewnej S.C.**

ul. Polna 33, 56-300 Sułów, Poland

🇵🇱 Phone: +48 602 289 150

🇬🇧 Phone: +48 784 244 391

🇩🇪 Phone: +48 795 482 694

e-mail: [m.m.stalnierdzewna@gmail.com](mailto:m.m.stalnierdzewna@gmail.com)

[www.mm-stalnierdzewna.pl](http://www.mm-stalnierdzewna.pl)